
[LF16] - Bright LED Backlit Display (10ft) with Side Walls (3ft)

Artwork Template - Side Walls

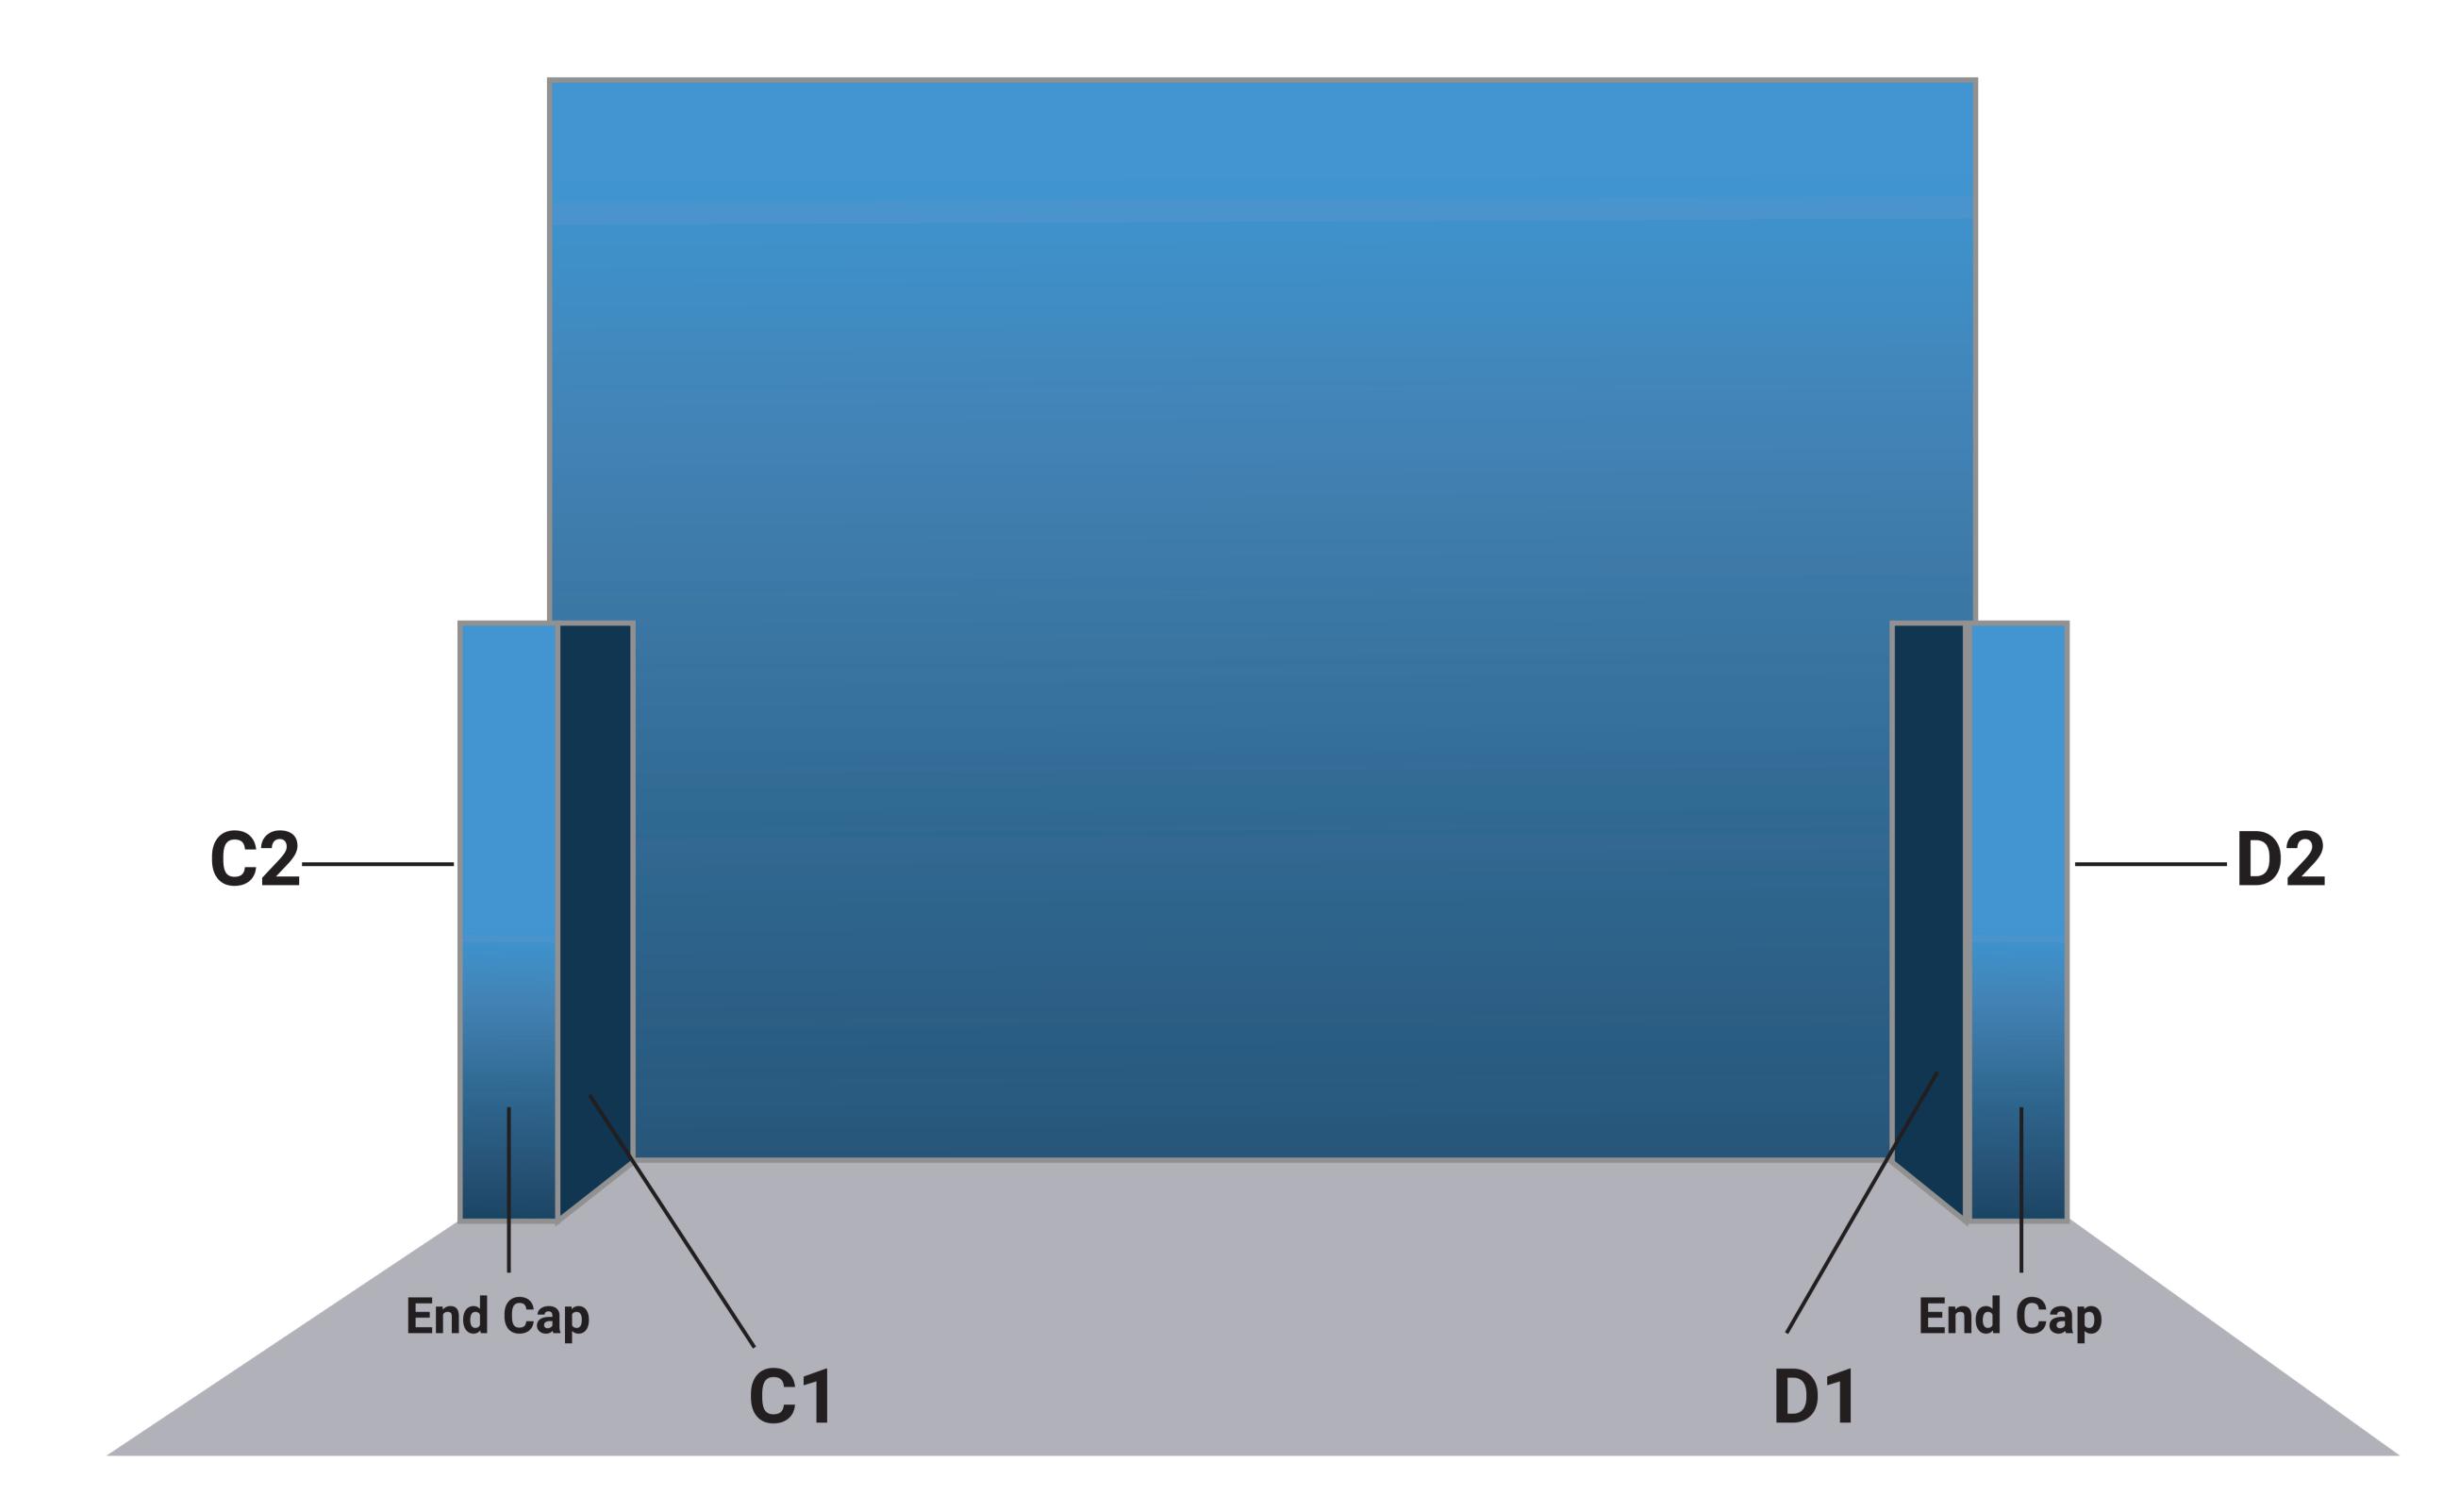

Bleeding area	
Safe Visual Line	

Notes to Designers

- All graphic files must be built at 150dp at the overall graphiclayout size.
- All graphic files must be created using CMYK mode to ensure the best color matching.
 If you would like a specific color matched, you MUST provide both PMS color and CMYK
- values or we cannot guarantee color matching.
- It is best to flatten all images and outline all text to ensure that nothing will be dropped out or changed during the file transfer.
- Graphics can be extended to the very edge but beware of the red visual line. Keep important images & text inside the red visual line. Images outside of the red visual line are subject to be trimmed off or covered by stitching
- Remove the red visual line and help instructions upon submitting your artwork.

Preferred File Formats:

- .PDF (Vector Format or 100% Sized, Text Outlined)
- .JPG / .JPEG (100% Sized, 150dpi)

Acceptable File Formats:

- .AI or .EPS (Text Outlined, Images Embedded)
- .PSD (100% Sized, 150dpi)

PANEL C1 & C2

PRINT SIZE W/ BLEED: 31.5" (W) x 89" (H) SAFE AREA: 25.5" (W) x 83.5" (H)

END CAP PRINT SIZE W/ BLEED: 14.25" x 59" END CAP SAFE AREA: 9.5" x 83.5"

PANEL D1 & D2

PRINT SIZE W/ BLEED: 31.5" (W) x 89" (H) SAFE AREA: 25.5" (W) x 83.5" (H)

END CAP PRINT SIZE W/ BLEED: 14.25" x 59" END CAP SAFE AREA: 9.5" x 83.5"

